
A Smart Solution for Storage & Distribution

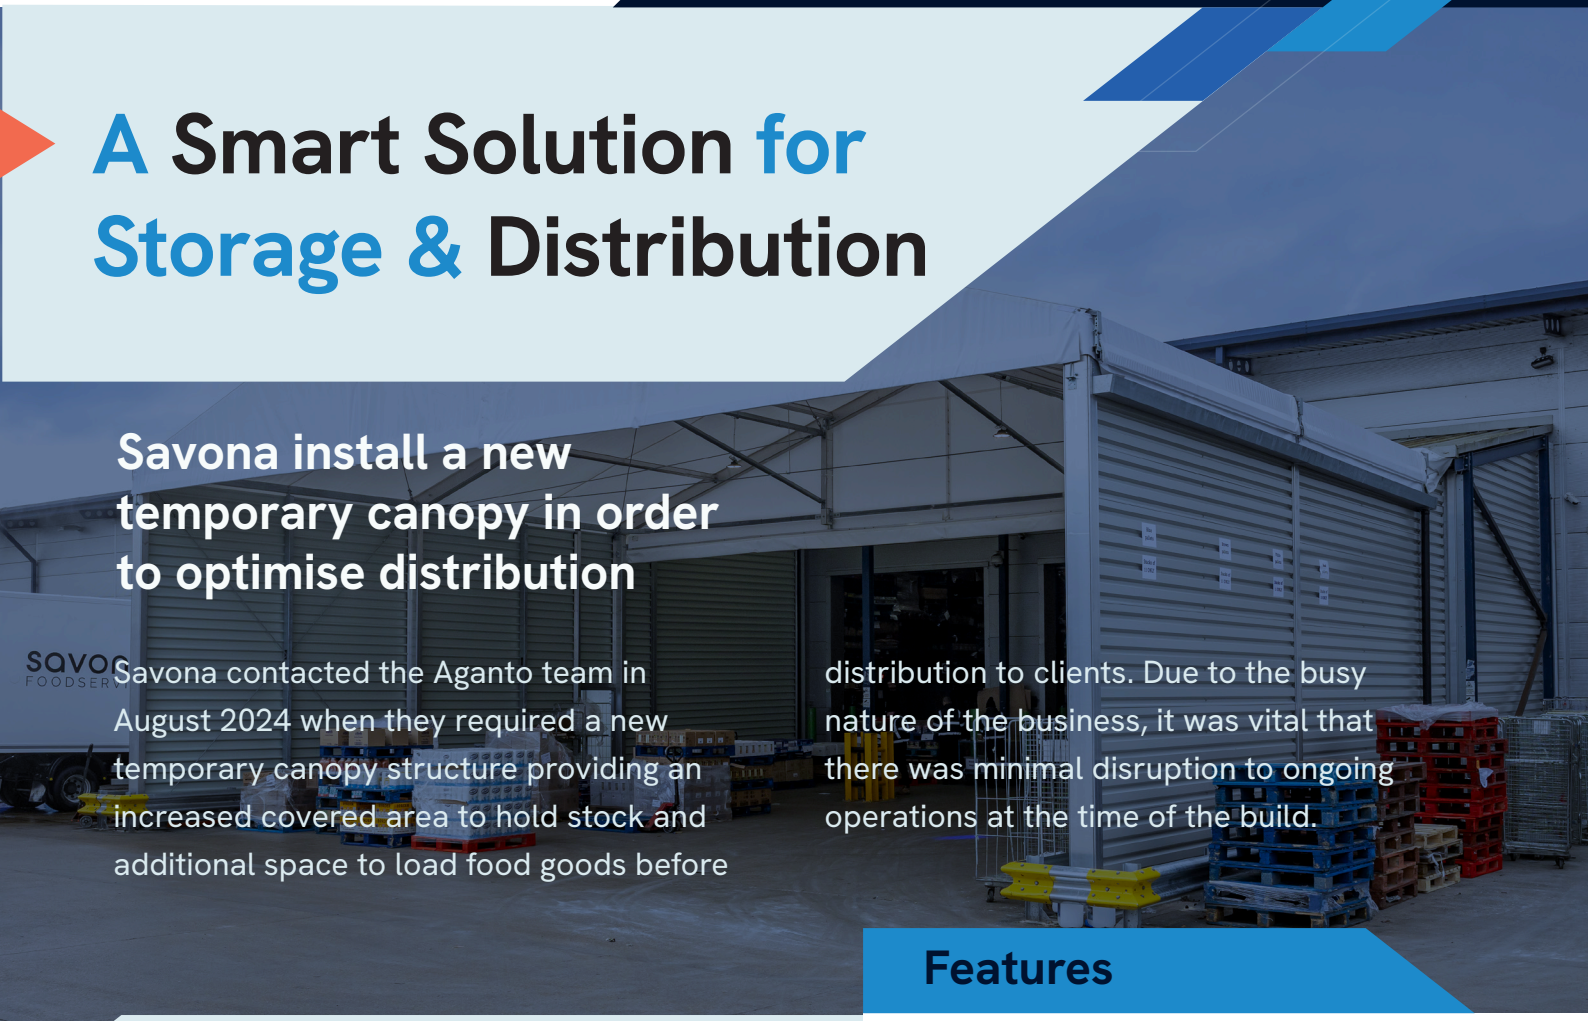

Savona install a new temporary canopy in order to optimise distribution

Savona contacted the Aganto team in August 2024 when they required a new temporary canopy structure providing an increased covered area to hold stock and additional space to load food goods before distribution to clients. Due to the busy nature of the business, it was vital that there was minimal disruption to ongoing operations at the time of the build.

Solution:

Aganto installed a 15m x 10m temporary canopy with an eave height of 5.2m. Single skin steel cladding was used for both eave walls and the structure was open on both gables to allow movement of goods in and out during the loading and unloading process. In order to maximise the covered space our client had for movement of stock it was decided that the structure would be integrated into their existing canopy. This was achieved by utilising a gutter link and filling in the corners where the two buildings met. The team also added a pedestrian door into the existing canopy. The new building was fitted with a single skin PVC roof and downpipes making it an ideal operational space.

To enable operations on site to continue as normal during the installation it was agreed that the four-day installation would be completed over the weekend beginning Friday and being completed on Monday. The install team worked in some of the wettest conditions of the winter to ensure the structure was in place and ready to use for our client the following week.

Features

- Gutter Linked
- Single Skin PVC Roof
- Pedestrian Access Doors



Projects: Temporary Canopies

www.aganto.co.uk